


Common Mode Line Filte ASQ-1212 Series


Product Identification:

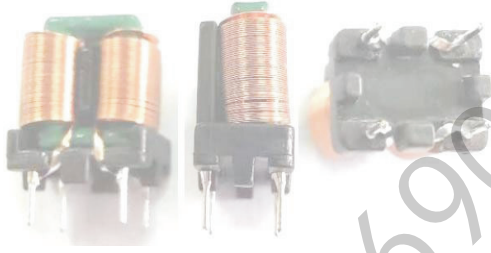

ASQ - 1212 - 103
(1) (2) (3)

- (1) Series
- (2) Dimensions(L*H)
- (3) Inductance (100=10uH, 101=100uH, 102=1000uH)

DIMENSIONS DRAWING:

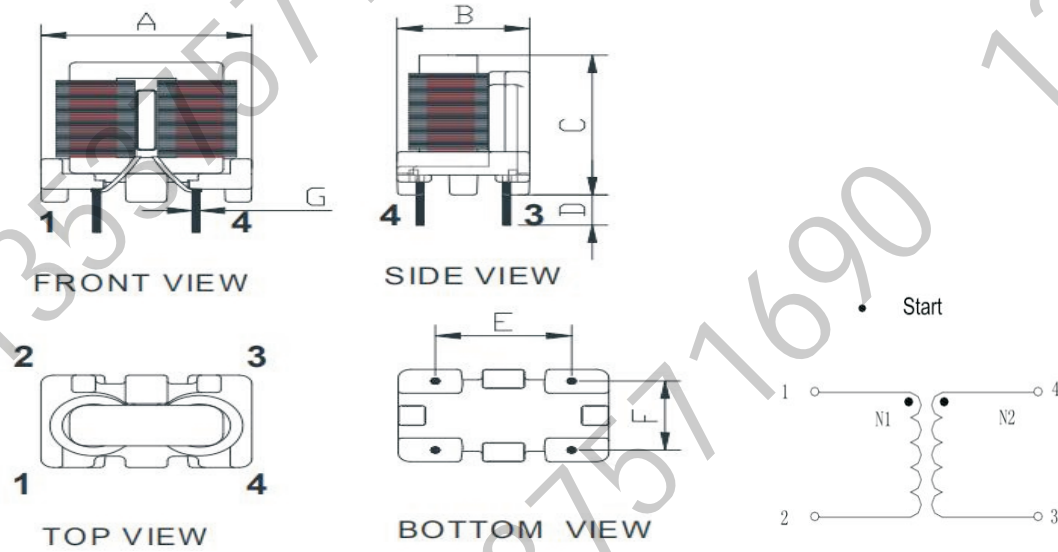

Shape and Dimensions									
TYPE	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)		
ASQ-1212	18.0Max	12.0Max	17.0Max	3.5±0.5	11±0.5	8.0±0.5	0.7±0.1		

Common Mode Line Filte ASQ - 1212 Series

ELECTRICAL CHARACTERISTIC:

Part Number	Inductance (mH) MIN	Test Conditions	DCR (mΩ) Max.	Hi-Pot	Reted Current
ASQ-1212-502	5	1KHZ/0.25V	100	1500V	3.6A
ASQ-1212-802	8	1KHZ/0.25V	150	1500V	2.8A
ASQ-1212-103	10	1KHZ/0.25V	200	1500V	2.3A
ASQ-1212-153	15	1KHZ/0.25V	220	1500V	1.3A
ASQ-1212-203	20	1KHZ/0.25V	220	1500V	1.0A

(1).Rated Current: Temp.rise 40°C Typ

(2).Operating Temperature: -40°C up to +125°C